




ARDIO/VISUAL CONTROLLER OPERATION MANUAL

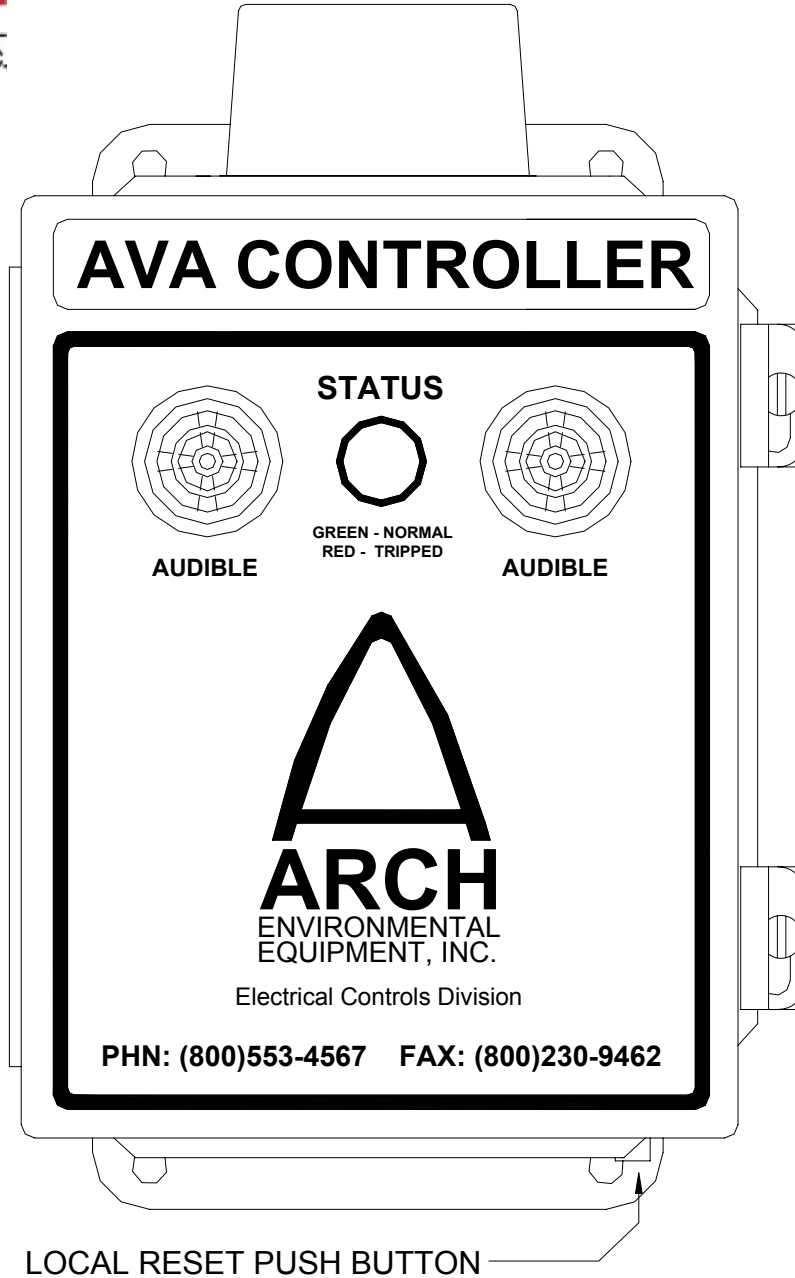

E1CMC00000AVA AUDIO / VISUAL ALARM CONTROLLER

The AVA Controller is an easy to use Audio Visual indicator for field equipment.

CONNECTIONS:


- 1) Connect de-energized 100 – 240VAC 50/60 Hz power to the power terminal in the lower left corner of the circuit board.
- 2) Connect the (normally open or normally closed) dry contact of the field device to the input signal terminals (+) and (SIG). Do not use the (-) of the input signal terminal.
- 3) Connect to the output relay if desired.
- 4) Connect to the external reset terminal block if external reset is needed. There is a local reset button on the bottom of the enclosure.
- 5) Energize the power to the controller.

OPERATION:

1. Status LED on the front of the enclosure will illuminate Green for a none trip condition, red for a trip condition, and flashing red when the reset button has been pressed once to silence the audio. The reset button will need to be pressed a second time to clear the trip condition.
2. Set rotary switch BCD1 to desired trip delay. 0 – No Delay or 1-9 Seconds.
3. J1 and J2 allow the audio and strobe to be disabled.

If you have any further questions concerning the AVA, call Arch Environmental at (800) 553-4567.

PCB LAYOUT

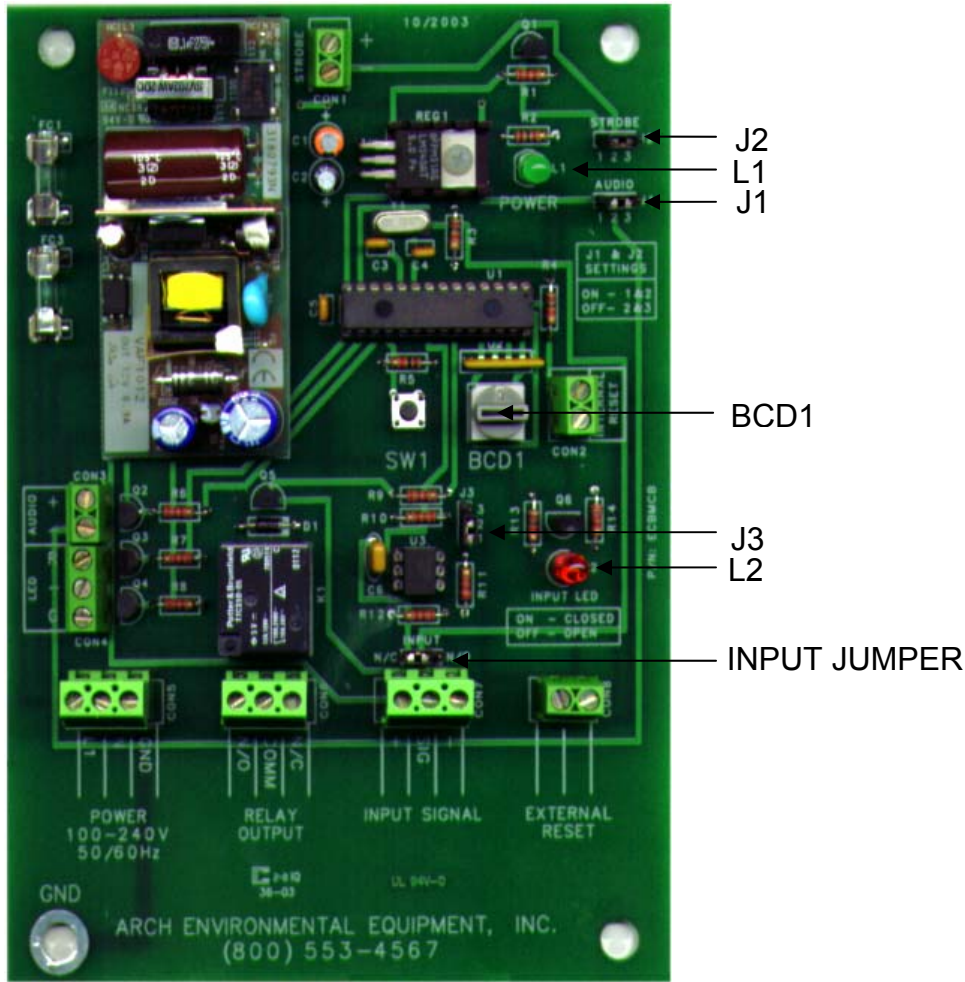

PCB CONNECTIONS

POWER:	100-240 VAC 50/60 Hz.
RELAY OUTPUT:	DRY CONTACT (1) N/O AND (1) NC.
INPUT SIGNAL:	LOOPS 12 VDC THROUGH FIELD DEVICE THAT HAS EITHER A N/O OR N/C CONTACT.
EXTERNAL RESET:	ALLOWS FOR EXTERNAL RESET WITH A NORMALLY OPEN, MOMENTARY PUSH PUTTON. <u>DO NOT APPLY VOLTAGE.</u>

JUMPER SETTINGS

J1	ENABLE / DISABLE AUDIO
J2	ENABLE / DISABLE STROBE
J3	SET AT FACTORY <u>DO NOT MOVE</u>
INPUT	SELECTS WEATHER THE INPUT IS N/O OR N/C

VISUAL INDICATIONS

L1	POWER INDICATION
L2	INPUT LED

OUTPUT RELAY RATING


12A @ 120VAC | 10A @ 240VAC | 10A @ 24 VDC

USER SELECTABLE


BCD1	SELECTS THE TRIP DELAY. 0 = NO DELAY 1-9 SECONDS
------	--

ENCLOSURE LAYOUT


TOP VIEW

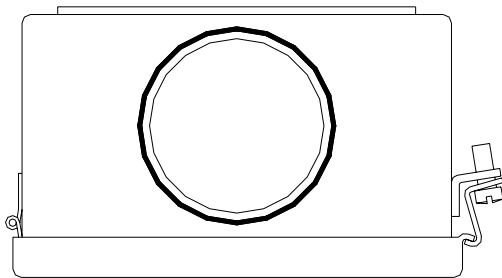

RED STROBE LIGHT

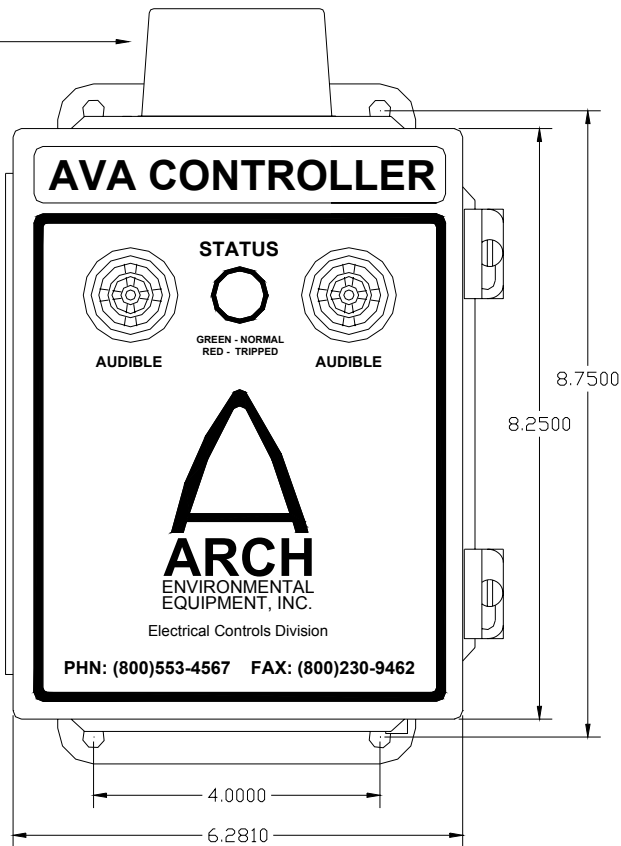


FRONT VIEW

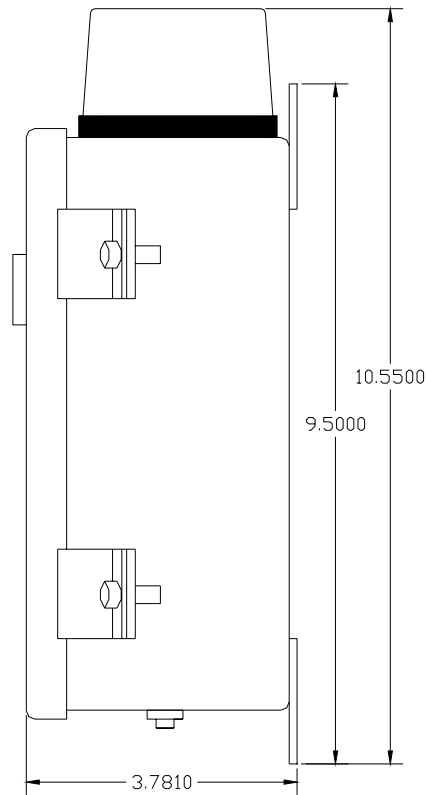

SIDE VIEW

RESET BUTTON

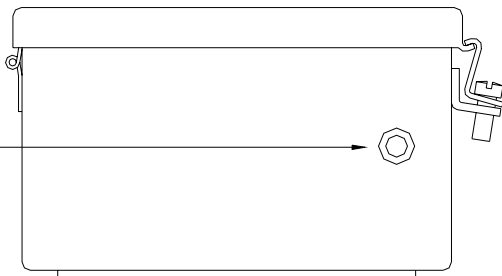

BOTTOM VIEW